

LAMINATE FLOORING 2023



ALSAFLOOR

IN-REGISTERED

RESISTANT

SUSTAINABLE

ALSAFLOOR



Marlenheim

Our vision for tomorrow's planet !

OUR DREAM PROJECT

Key points are Waste, Resources, Energy, Alsaflooring and Emissions.

This environmentally-focused strategy is applied across the whole company to prevent any negative effects on our planet.

All of us, employees, customers, partners and suppliers alike, are involved in this sincere and realistic project.



Learn more about our project in video

Why choose ALSAFLOOR ?



CHOOSE A FRENCH MANUFACTURER !

Our plant is located in Alsace and we are the only laminate manufacturer in the country.



A SHORT CIRCUIT VALUED

We source our materials via short supply chains in France and the EU.



A MANUFACTURER PROUD OF ITS EFFORTS FOR THE ENVIRONMENT

Our factory is fitted with photovoltaic panels and a biomass boiler. We burn our wood waste (sawdust) to produce hot water and heat our plant.

CONTENTS

Page 4

Page 5

Page 6

**ALSAFLOOR RANGES
SURFACE STRUCTURES
WATER RESISTANT**

Pages 7 to 13

Pages 8 & 9

Pages 10 & 11

Pages 12 & 13

12 mm

HERRINGBONE 12 MM

SOLID PLUS

SOLID MEDIUM

Pages 14 to 25

Pages 16 & 17

Pages 18 & 19

Pages 20 & 21

Pages 22 & 23

Pages 24 & 25

8 mm

ELEGANT HERRINGBONE

ELEGANT

ELEGANT MEDIUM

OSMOZE

CLIP400

Pages 26 to 30

Page 31


Pages 32 & 33

Pages 34 & 35

**DESIGNS
PRODUCT RANGES
TECHNICAL FEATURES
ACCESSORIES**

ALSAFLOOR

A 100% WATER RESISTANT AND IN-REGISTERED RANGE

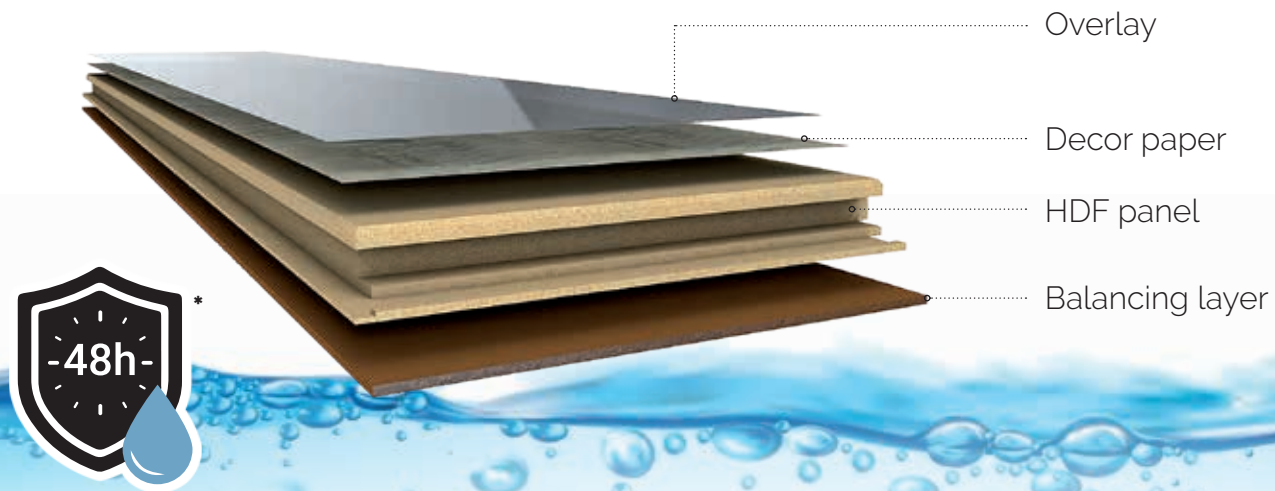

LAMINATE RANGES

12 mm
RANGE

HERRINGBONE

AC6



35
YEARS
GUARANTEE



SOLID PLUS

AC6



35
YEARS
GUARANTEE



SOLID MEDIUM

AC6



35
YEARS
GUARANTEE



ELEGANT
HERRINGBONE

AC5



25
YEARS
GUARANTEE




ELEGANT

AC5



25
YEARS
GUARANTEE



ELEGANT MEDIUM

AC5



25
YEARS
GUARANTEE



OSMOZE

AC5



25
YEARS
GUARANTEE



CLIP 400

AC5



25
YEARS
GUARANTEE



SURFACE STRUCTURES




In-Registered texture



A raised surface **along the wood veins** offers a strikingly realistic sense of authenticity !




In-Registered texture heliochrome

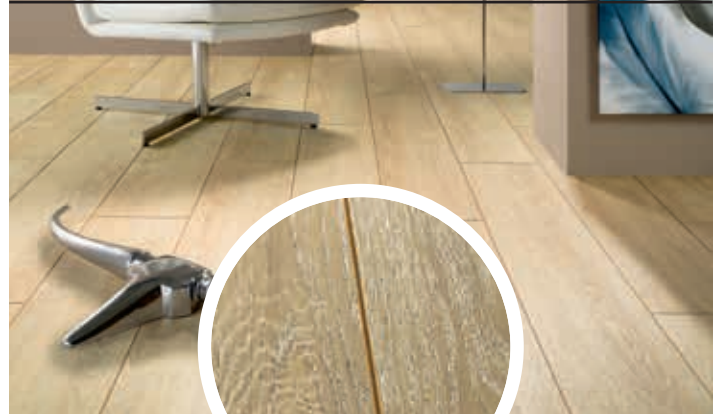


A mat / glossy effect (**mat on the surface and glossy in the wood grain**) for a deeper and more apparent structure.

CLIP SYSTEMS



A clip system that locks the planks together.



Designed and patented by Alsaflooring.
Does away with the need for a left and right plank.

CLASSES OF USE 100% INTENSIVE USE

AC5

AC6

Abrasion resistance
AC5 AC6



Heavy domestic and heavy commercial use.

STANDARDS




*Information as to emissions of volatile compounds in the indoor air, which might be harmful to the health when inhaled, on a scale from Class A+ (very low emissions) to C (high emissions).



Our products are made from wood taken from sustainably managed forests and PEFC™ certified.

CE The EC symbol on all our products certifies that they are produced in compliance with currently applicable standards and that they can move freely between countries within the European Community.

A water-resistant laminate flooring

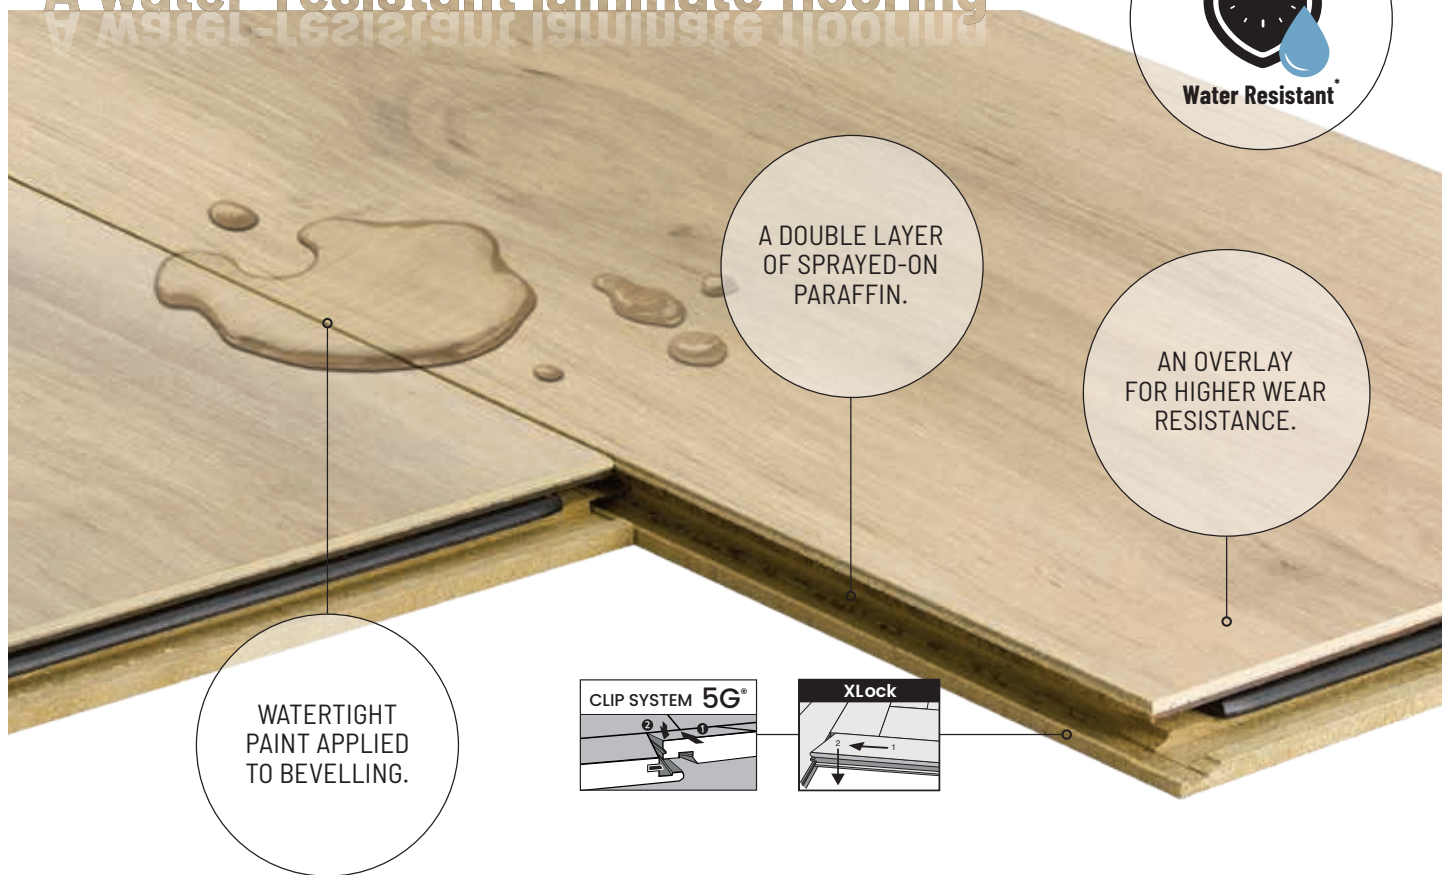

WATERTIGHT PRODUCTS

We use innovative technology based on the application of waterproof paint on the bevelling and a specific-purpose impermeable paraffin to make our assembly system watertight. Our WR products comply with NALFA level I requirements.

HARDWEARING PRODUCTS

Our WR products are rated AC5 and AC6 for wear resistance, allowing them to be fitted in any household room and in business premises (moderate to intensive use - class 23/33). Our 5G and XLOCK assembly systems are the guarantee of a robust, stable installation.

ENVIRONMENTALLY FRIENDLY

The whole of our range is PEFC™ certified, offering verified assurance that all the wood used in it originates from sustainably managed forests. Our WR range is rated A+, for indoor air quality.

Do not forget

UNDERLAY
+ GROUT LINER
+ WR FILLER

*No change in appearance and swelling ≤ 0.2 mm. Test performed according to NALFA guidelines and the ISO 4760 standard.

ALSAFLOOR
RANGE

12 mm



Water
resistant*



708 ULYSSES

HERRINGBONE
SOLID PLUS
SOLID MEDIUM



HERRINGBONE 12 MM

An authentic, traditional design with an embossed finish produces a result stunningly similar to genuine parquet.




535 PRALINE OAK



542 CHOKEBERRY OAK



708 ULYSSES




SIMPLIFY
THE INSTALLATION,
ORDER YOUR STARTING
TRIANGLE KIT




2 triangles/box available
in every finish


WATCH NOW
ON YOUTUBE, THE
INSTALLATION OF THE
HERRINGBONE XLOCK !

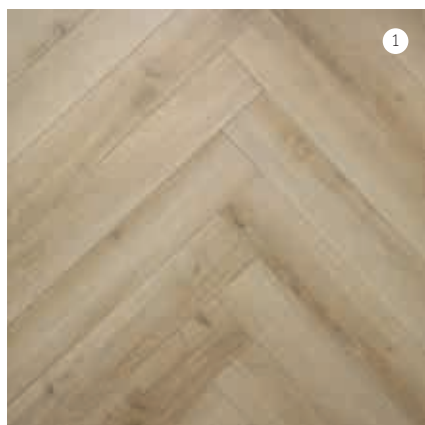


435 Jefferson

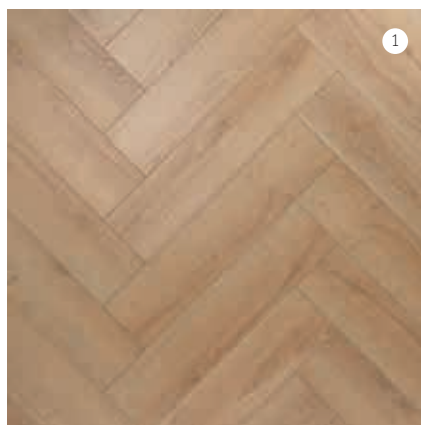


471 Sunset

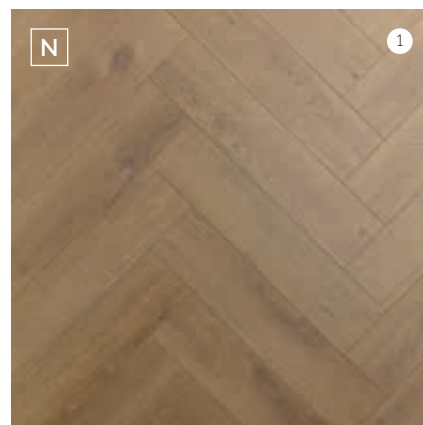


529 Almond oak

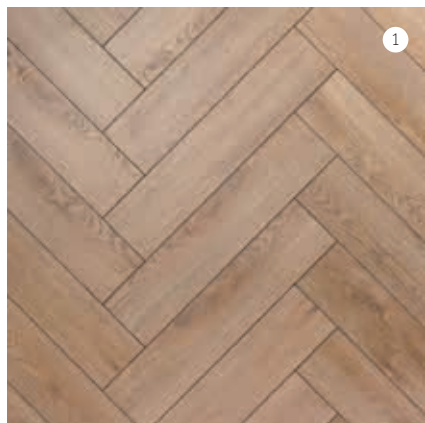


535 Praline oak

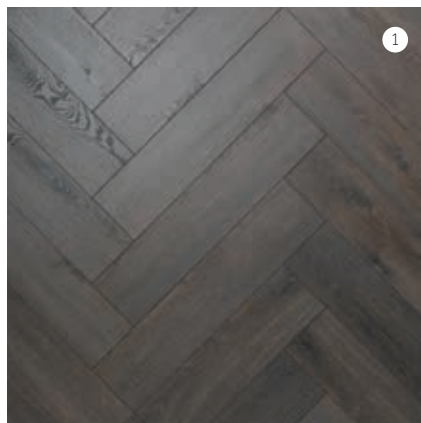


542 Chokeberry oak

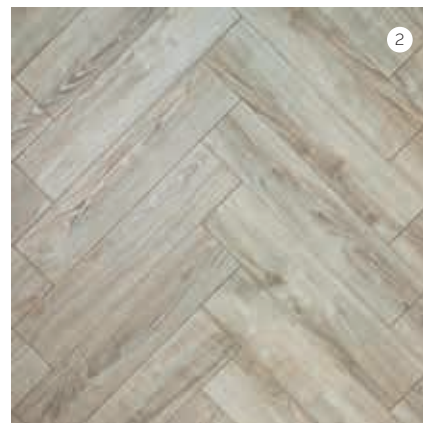


619 Sardinia oak

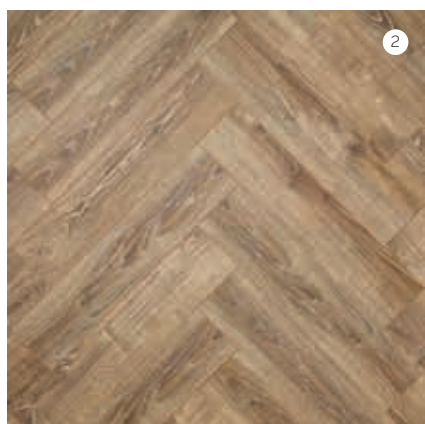

622 Balearic oak

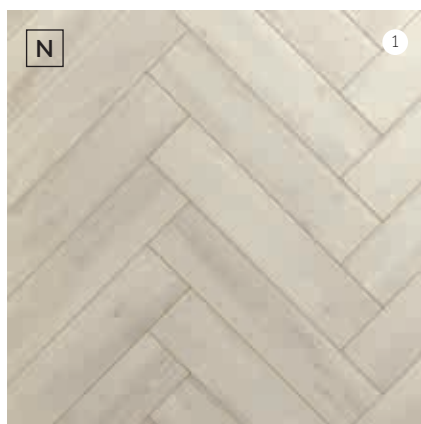

701 Plato

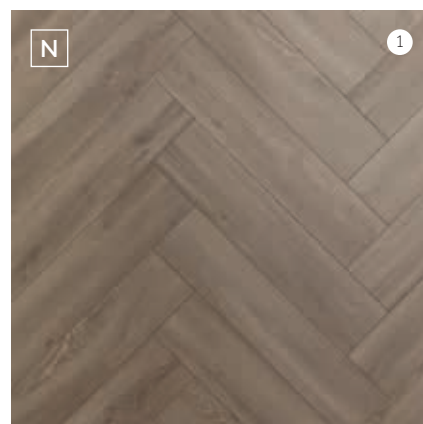


708 Ulysses



SOLID PLUS


An extra-large width offers a laminate with a sense of depth, space and style.

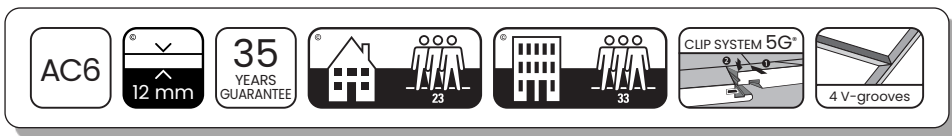


559 CARMINE OAK



707 GORGIAS

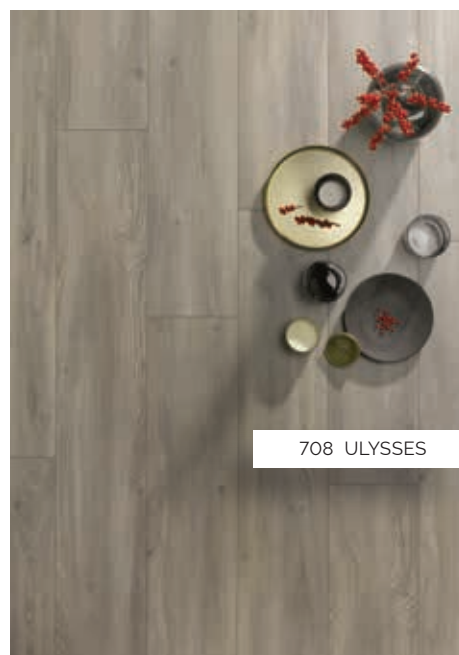

708 ULYSSES

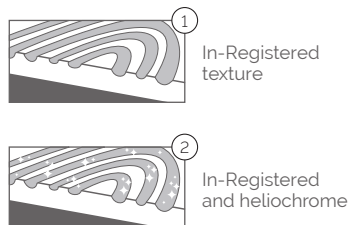

435 Jefferson



471 Sunset



514 Namur



518 Rafia



528 Chestnut oak




529 Almond oak




535 Praline oak



536 Linen oak

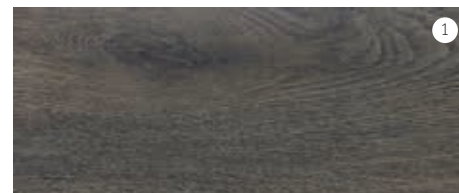

542 Chokeberry oak

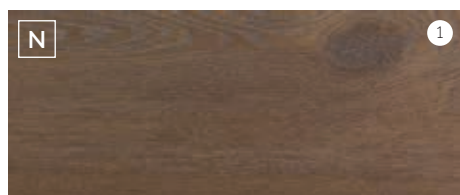

559 Carmine oak



619 Sardinia oak



621 Canaries oak



622 Balearic oak



627 Polar oak




701 Plato



702 Aristotle



707 Gorgias

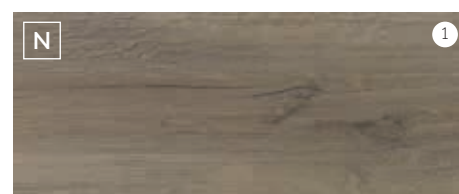


708 Ulysses

Technical features	length: 1286 mm	width: 214 mm	panel: hdf	boards/kit: 6	sqm/kit: 1,65	weight/kit: 18,10 kg
--------------------	-----------------	---------------	------------	---------------	---------------	----------------------




SOLID MEDIUM


All the features of the Solid range, specially designed for smaller areas.



701 PLATO



435 Jefferson

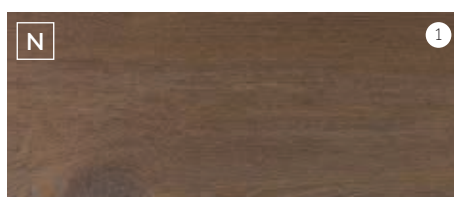

559 Carmine oak



619 Sardinia oak



621 Canaries oak



622 Balearic oak




701 Plato



702 Aristotle



707 Gorgias

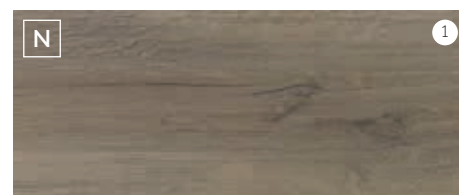

708 Ulysses

Technical features	length: 1286 mm	width: 122 mm	panel: hdf	boards/kit: 6	sqm/kit: 0,94	weight/kit: 10,50 kg
--------------------	-----------------	---------------	------------	---------------	---------------	----------------------

ALSAFLOOR
RANGE

8 mm



Water
resistant*

'hu:ge:/ [hue-guh]
nygge

707 GORGAS

ELEGANT HERRINGBONE

ELEGANT

ELEGANT MEDIUM

OSMOZE

CLIP 400



ELEGANT CONCEPT

The Elegant style features streamlined, timeless designs, producing appealing, sophisticated interiors.
The ideal solution for emphasising the intimacy of your surroundings.



ELEGANT HERRINGBONE

A warm, classic pattern that brings out the unique warmth of the Elegant concept designs.



525 CALISSON OAK


SIMPLIFY
THE INSTALLATION,
ORDER YOUR STARTING
TRIANGLE KIT



Patented
triangles

2 triangles/box available
in every finish

WATCH NOW
ON YOUTUBE, THE
INSTALLATION OF THE
HERRINGBONE XLOCK !

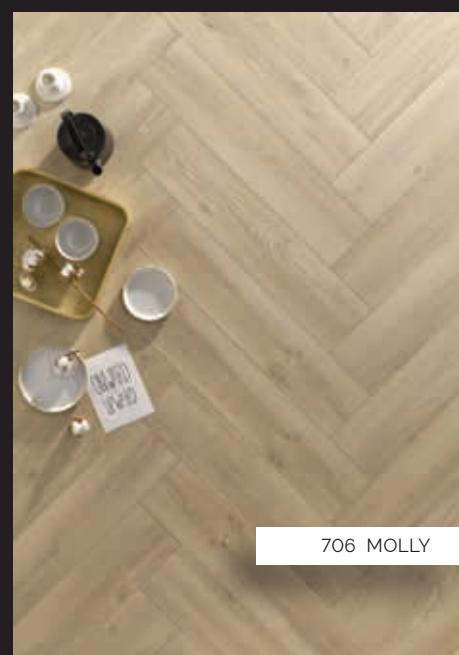


706 MOLLY




In-Registered
texture




511 KRAFT OAK

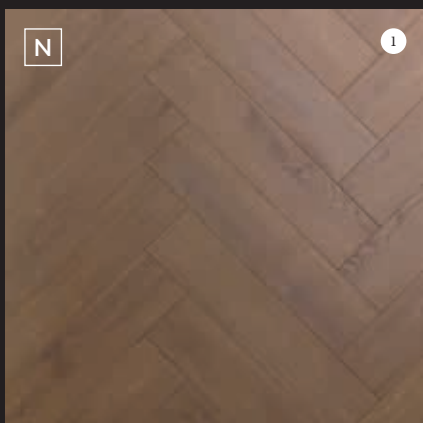


508 Bolero oak

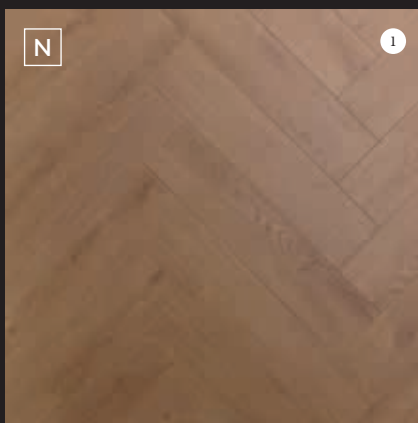


511 Kraft oak

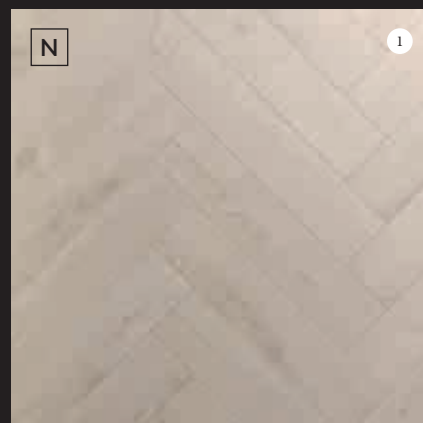


521 Aida oak

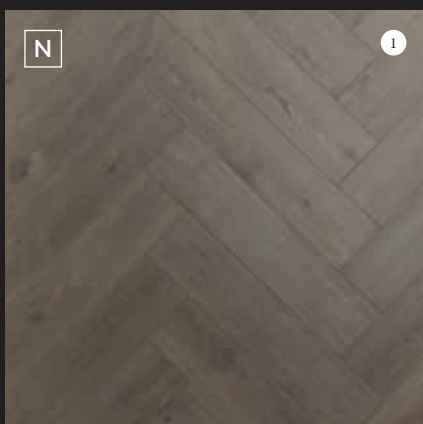


524 Poppy oak

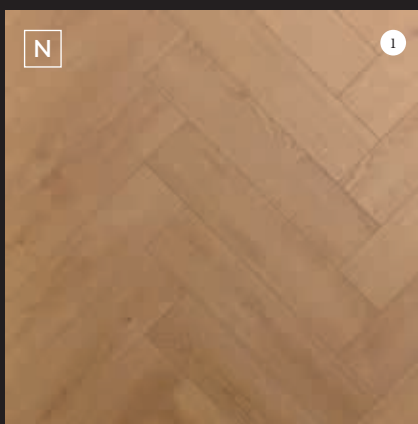


525 Calisson oak

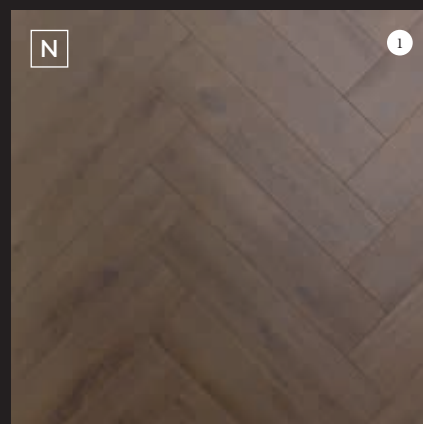


560 Stromboli

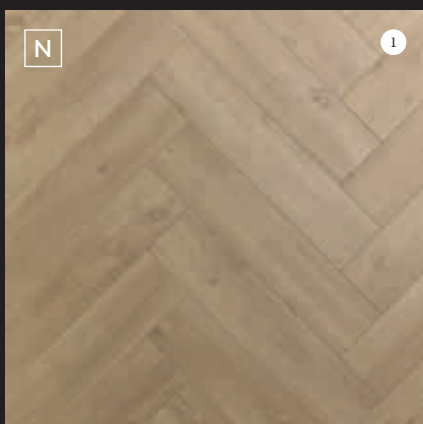

706 Molly

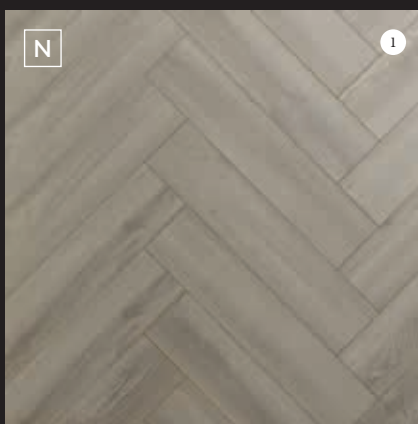

707 Gorgias

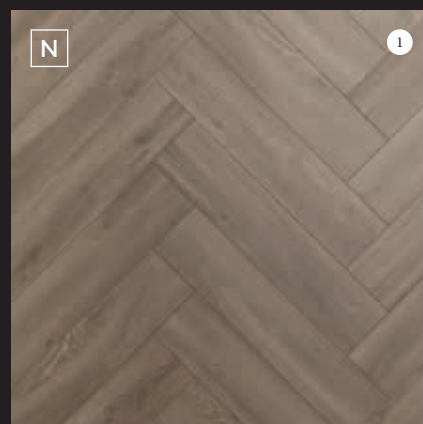

708 Ulysses

Technical features

length: 644 mm

width: 143 mm

panel: hdf

boards/kit: 20

sqm/kit: 1,84

weight/kit: 13,15 kg




ELEGANT

A comfortably sophisticated, warm look.




511 KRAFT OAK

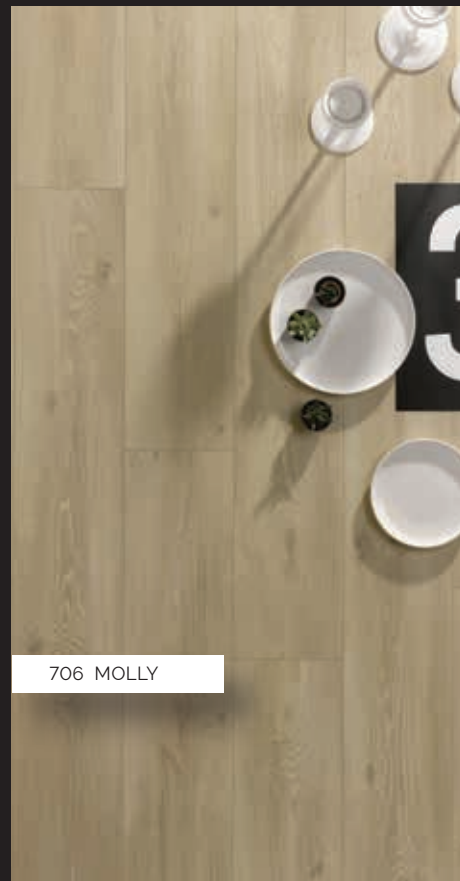

706 MOLLY



525 CALISSON OAK



In-Registered
texture



508 Bolero oak




511 Kraft oak



521 Aida oak



524 Poppy oak

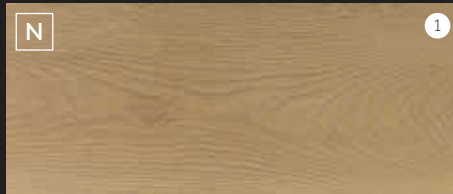


525 Calisson oak




560 Stromboli



706 Molly

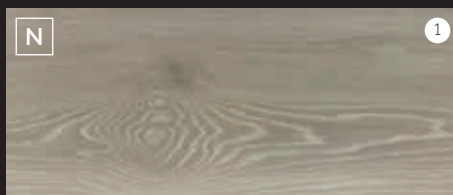

707 Gorgias

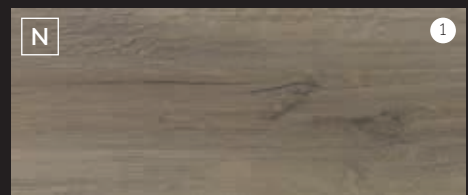

708 Ulysses

Technical features

length: 1286 mm

width: 192 mm

panel: hdf

boards/kit: 9

sqm/kit: 2,22

weight/kit: 16 kg



ELEGANT MEDIUM

122 mm planks offer unparalleled elegance.



508 BOLERO OAK



521 AIDA OAK




In-Registered
texture



560 STROMBOLI



508 Bolero oak

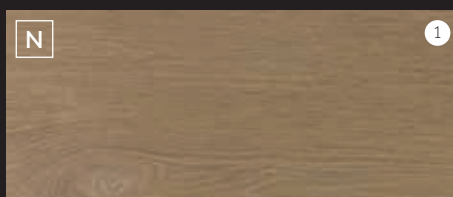


511 Kraft oak



521 Aïda oak



524 Poppy oak

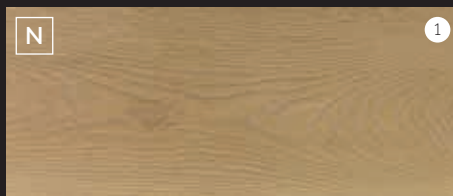


525 Calisson oak




560 Stromboli



706 Molly

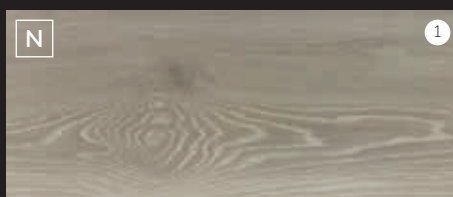

707 Gorgias

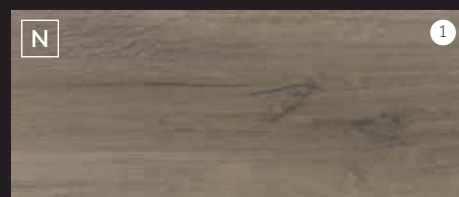

708 Ulysses

Technical features

length: 1286 mm

width: 122 mm

panel: hdf

boards/kit: 9

sqm/kit: 1,41

weight/kit: 10,30 kg





OSMOZE

A wide range of strikingly realistic designs for all preferences.


AC5

8 mm


25
YEARS
GUARANTEE



535 PRALINE OAK

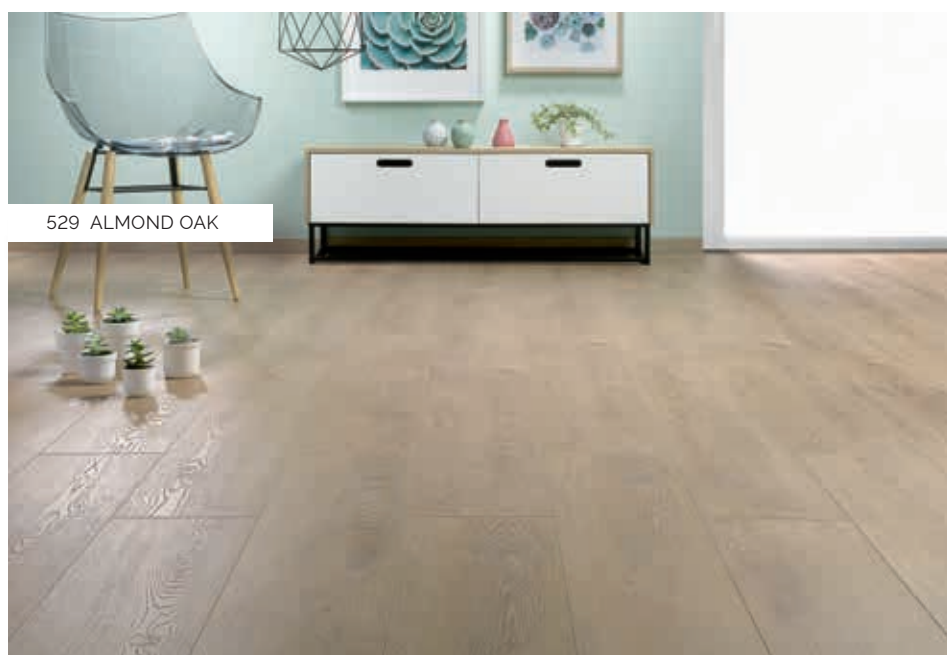

529 ALMOND OAK

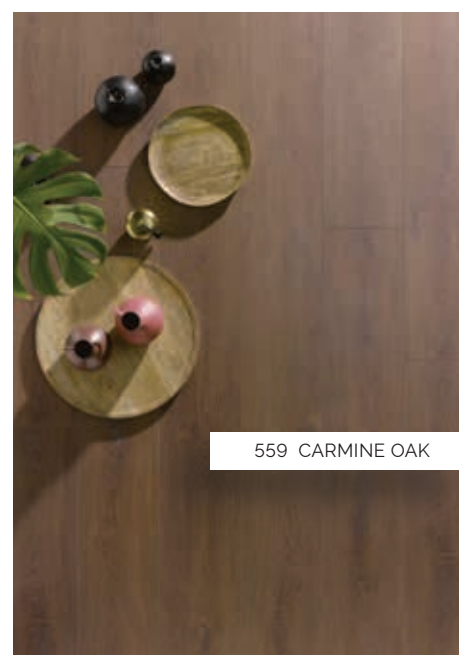


559 CARMINE OAK



420 Taza oak



436 Alpaca oak

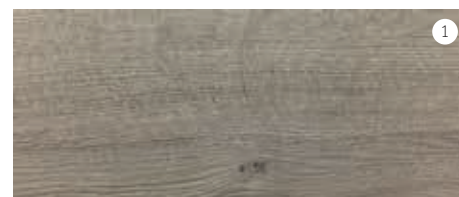

437 Grey building



448 Grey oak



449 Nevada oak




450 Nature oak



514 Namur



518 Rafia

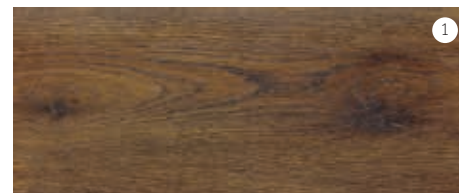

528 Chestnut oak



529 Almond oak




535 Praline oak




536 Linen oak



541 Coco oak

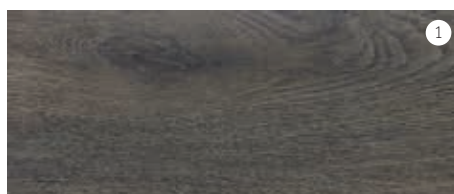

542 Chokeberry oak

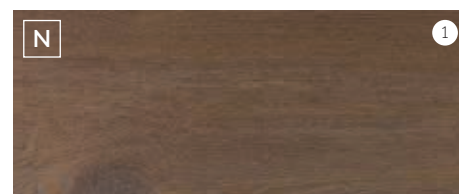

559 Carmine oak



701 Plato



702 Aristotle




705 Papyrus

Technical features	length: 1286 mm	width: 192 mm	panel: hdf	boards/kit: 9	sqm/kit: 2.22	weight/kit: 16 kg
--------------------	-----------------	---------------	------------	---------------	---------------	-------------------



CLIP 400

A wide choice of neat designs, without bevels, for all decorative ideas.



514 NAMUR



705 PAPYRUS




536 LINEN OAK



420 Taza oak



436 Alpaca oak

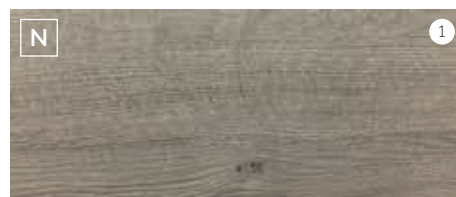

437 Grey building



448 Grey oak



449 Nevada oak




450 Nature oak



514 Namur



518 Rafia

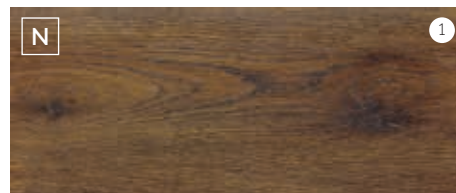

528 Chestnut oak



529 Almond oak




535 Praline oak




536 Linen oak



541 Coco oak

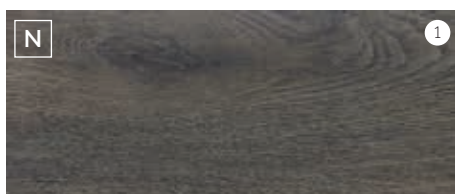

542 Chokeberry oak

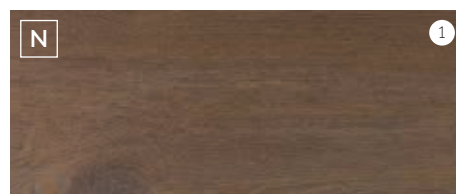

559 Carmine oak



701 Plato



702 Aristotle



705 Papyrus

DESIGNS



420 Taza oak
Available in the ranges
Osmoze / Clip 400




In-Registered
texture



435 Jefferson
Available in the ranges
Herringbone / Solid plus /
Solid Medium



In-Registered
texture

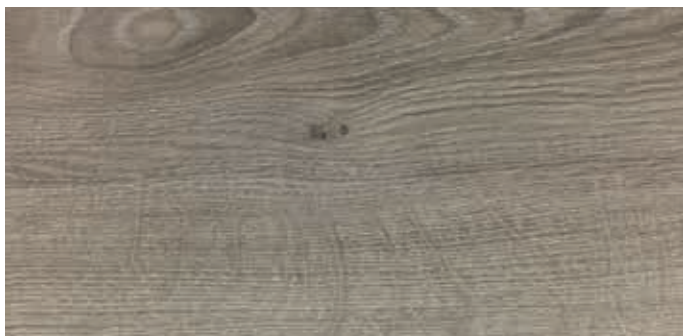

437 Grey building
Available in the ranges
Osmoze / Clip 400



In-Registered
texture



436 ALPACA OAK



436 Alpaca oak
Available in the ranges
Osmoze / Clip 400



In-Registered
texture



448 Grey oak
Available in the ranges
Osmoze / Clip 400



In-Registered
texture



449 Nevada oak
Available in the ranges
Osmoze / Clip 400




450 Nature oak
Available in the ranges
Osmoze / Clip 400



471 Sunset
Available in the ranges
Herringbone / Solid plus



508 Bolero oak
Available in the ranges
Elegant Herringbone / Elegant /
Elegant medium

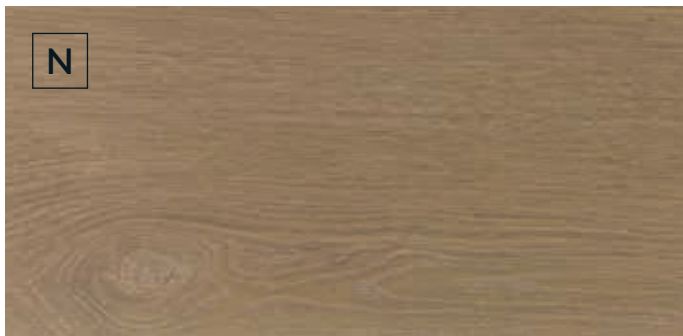


511 Kraft oak
Available in the ranges
Elegant Herringbone / Elegant /
Elegant medium



514 Namur
Available in the ranges
Solid plus / Osmoze / Clip 400



518 Rafia
Available in the ranges
Solid plus / Osmoze / Clip 400

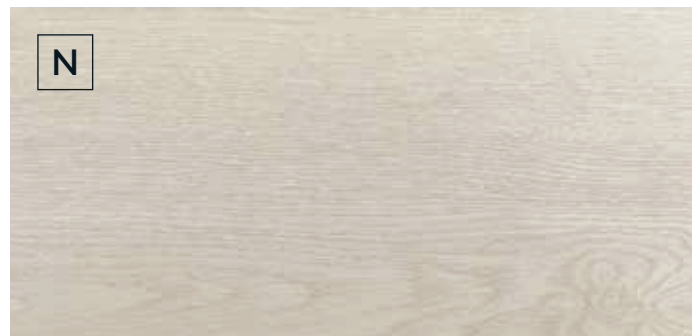

521 Aïda oak
Available in the ranges
Elegant Herringbone / Elegant /
Elegant medium





529 ALMOND OAK



N

524

Poppy oak

Available in the ranges
Elegant Herringbone / Elegant /
Elegant medium



In-Registered
texture



N

525

Calisson oak

Available in the ranges
Elegant Herringbone / Elegant /
Elegant medium



In-Registered
texture



528

Chestnut oak

Available in the ranges
Solid plus / Osmoze / Clip 400



In-Registered
texture



529

Almond oak

Available in the ranges
Herringbone / Solid plus /
Osmoze / Clip 400



In-Registered
texture



535 Praline oak
Available in the ranges
Herringbone / Solid plus /
Osmoze / Clip 400




In-Registered
texture



536 Linen oak
Available in the ranges
Solid plus / Osmoze / Clip 400



In-Registered
texture

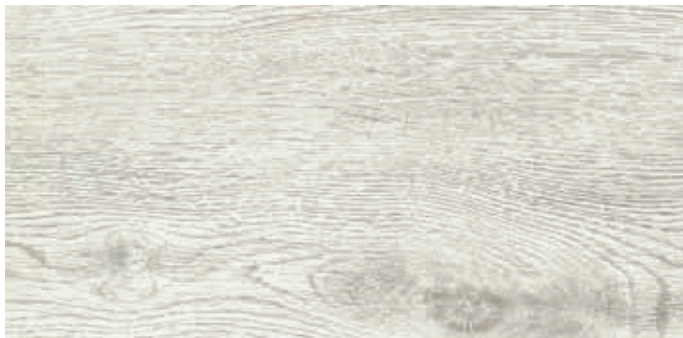

541 Coco oak
Available in the ranges
Osmoze / Clip 400




In-Registered
texture



542 Chokeberry oak
Available in the ranges
Herringbone / Solid plus /
Osmoze / Clip 400



In-Registered
texture

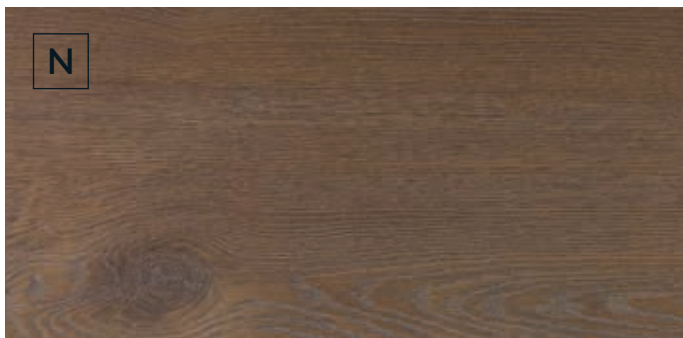

559 Carmine oak
Available in the ranges
Solid plus / Solid medium
Osmoze / Clip 400



In-Registered
texture



560 Stromboli
Available in the ranges
Elegant Herringbone / Elegant /
Elegant medium



In-Registered
texture



619 Sardinia oak
Available in the ranges
Herringbone / Solid plus /
Solid medium



In-Registered
heliochrome



621 Canaries oak
Available in the ranges
Solid plus / Solid medium



In-Registered
heliochrome



622 Balearic oak
Available in the ranges
Herringbone / Solid plus /
Solid medium



In-Registered
heliochrome



627 Polar oak
Available in the range
Solid plus



In-Registered
heliochrome



701 Plato
Available in the ranges
Herringbone / Solid plus /
Solid medium / Osmoze / Clip 400



In-Registered
texture



702 Aristotle
Available in the ranges
Solid plus / Solid medium /
Osmoze / Clip 400



In-Registered
texture



705 Papyrus
Available in the ranges
Osmoze / Clip 400



In-Registered
texture



706 Molly
Available in the ranges
Elegant Herringbone / Elegant /
Elegant medium



In-Registered
texture



707 Gorgias
Available in the ranges: Solid plus /
Solid medium / Elegant Herringbone /
Elegant / Elegant medium



In-Registered
texture



708 Ulysses
Available in the ranges:
Herringbone / Solid plus / Solid medium /
Elegant Herringbone / Elegant /
Elegant medium



In-Registered
texture

2023 DESIGNS

2023 DESIGNS		12 mm			8 mm				
		HERRINGBONE	SOLID PLUS	SOLID MEDIUM	ELEGANT HERRINGBONE	ELEGANT	ELEGANT MEDIUM	OSMOZE	CLIP 400
		P8-9	P10-11	P12-13	P16-17	P18-19	P20-21	P22-23	P24-25
420	Taza oak							•	<div>N</div>
435	Jefferson	•	•	•					
436	Alpaca oak							•	<div>N</div>
437	Grey building							•	<div>N</div>
448	Grey oak							•	•
449	Nevada oak							•	•
450	Nature oak							•	•
471	Sunset	•	•						
508	Bolero oak				<div>N</div>	<div>N</div>	<div>N</div>		
511	Kraft oak				<div>N</div>	<div>N</div>	<div>N</div>		
514	Namur		•					•	<div>N</div>
518	Rafia		•					•	•
521	Aïda oak				<div>N</div>	<div>N</div>	<div>N</div>		
524	Poppy oak				<div>N</div>	<div>N</div>	<div>N</div>		
525	Calisson oak				<div>N</div>	<div>N</div>	<div>N</div>		
528	Chestnut oak		•					•	<div>N</div>
529	Almond oak	<div>N</div>	•					•	<div>N</div>
535	Praline oak	•	•					•	<div>N</div>
536	Linen oak		•					•	<div>N</div>
541	Coco oak							•	<div>N</div>
542	Chokeberry oak	•	•					•	<div>N</div>
559	Carmine oak		<div>N</div>	<div>N</div>				<div>N</div>	<div>N</div>
560	Stromboli				<div>N</div>	<div>N</div>	<div>N</div>		
619	Sardinia oak	•	•	•					
621	Canaries oak		•	•					
622	Balearic oak	•	•	•					
627	Polar oak		•						
701	Plato	<div>N</div>	•	•				•	•
702	Aristotle		•	•				•	•
705	Papyrus							•	•
706	Molly				<div>N</div>	<div>N</div>	<div>N</div>		
707	Gorgias		<div>N</div>	<div>N</div>	<div>N</div>	<div>N</div>	<div>N</div>		
708	Ulysses	<div>N</div>	<div>N</div>	<div>N</div>	<div>N</div>	<div>N</div>	<div>N</div>		

TECHNICAL FEATURES

		12 mm		
		HERRINGBONE	SOLID PLUS	SOLID MEDIUM
CHARACTERISTICS	Warranty	35 years	35 years	35 years
	Profile and assembly	X Lock	5G®	5G®
	Surface structures	←———— Depends on the design ———→		
	Bevels	4 V-grooves	4 V-grooves	4 V-grooves
	Quality	←———— Standard DPL ———→		
	Core	←————	HDF	←————
	Total thickness in mm	12	12	12
	Dimension of the board in mm	644 x 143	1286 x 214	1286 x 122
TESTS	Class of use	23/33	23/33	23/33
	Abrasion resistance • EN 13329	AC6	AC6	AC6
	Impact resistance • EN 13329	IC3	IC3	IC3
	Resistance to chemical agents • EN 438	←———— Group 1/2: 5 - Group 3: 4 ———→		
	Resistance to cigarettes burns • EN 438-2-18	←———— Degree 4 ———→		
	Resistance to light effect • EN 438-2-16	←———— Degree ≥ 6 ⁽¹⁾ ———→		
	Thermal resistance sqm K/W	←———— ≤ 0,15 ———→		
	Core formaldehyde content • EN 120	←———— Inoffensive, E1 quality (8 mg/100 g) ———→		
	Laminate flooring formaldehyde emission • NF EN717-2	←———— E1 ≤ 3,5 mg/sqm.h ———→		
	Reaction to fire - Fire report • EN13501-1	←———— Laminate flooring fitted with underlays included in the fire report: Cfl S1 ———→		
LOGISTICS	Declaration of conformity - CE ⁽²⁾ labelling	Yes	Yes	Yes
	PEFC ⁽³⁾	Yes	Yes	Yes
	Health safety labelling ⁽⁴⁾	←———— A+ Class ———→		
	Boards per kit	13	6	6
	Area per kit in sqm	1,20	1,65	0,94
	Weight per kit in kg	13,10	18,10	10,50
	Kit packaging	box	box	box
	Number of kits per pallet	60	48	78
	Area per pallet (sqm)	71,80	79,30	73,40
	Weight pallet in kg	786	869	819



This information is given for information purpose only and specifications are liable to change without warning.

⁽¹⁾ Blue wool scale part B02 ≥ 6. Grey scale, part A02 ≥ 4.

⁽²⁾ EC marking declaration of conformity available on request on our website. All our products comply with the EN 14041 norm.

⁽³⁾ Our products are manufactured with wood from sustainable forests.

⁽⁴⁾ Information as to emissions of volatile compounds in the indoor air, which might be harmful to the health when inhaled, on a scale from Class A+ (very low emissions) to C (high emissions).

8 mm				
ELEGANT HERRINGBONE	ELEGANT	ELEGANT MEDIUM	OSMOZE	CLIP 400
25 years	25 years	25 years	25 years	25 years
X Lock	5G®	5G®	5G®	5G®
	Depends on the design		→	
4 V-grooves	4 V-grooves	4 V-grooves	4 V-grooves	Non
	Standard DPL			→
	HDF			→
8	8	8	8	8
644 x 143	1286 x 192	1286 x 122	1286 x 192	1286 x 192
23/33	23/33	23/33	23/33	23/33
AC5	AC5	AC5	AC5	AC5
IC3	IC3	IC3	IC3	IC3
	Group 1/2: 5 - Group 3: 4			→
	Degree 4			→
	Degree ≥ 6 ⁽¹⁾			→
	≤ 0,15			→
	Inoffensive, E1 quality (8 mg/100 g)			→
	E1 ≤ 3,5 mg/sqm.h			→
	Laminate flooring fitted with underlays included in the fire report: Cfl S1			→
Yes	Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes	Yes
	A+ Class			→
20	9	9	9	9
1,84	2,22	1,41	2,22	2,22
13,15	16	10,30	16	16,10
box	box	box	box	box
60	48	78	48	52
110,50	106,70	110,10	106,70	115,60
789	768	803	768	835

ACCESSORIES COORDINATED WITH FLOORING DESIGNS



Skirting F58 ou F80

Dim: 2200 x 58 x 12 mm ou 2200 x 80 x 15 mm.
X 5 skirtings = 11 ml. to clip, tack, screw or glue.

Scoties

Dim: 2200 x 16 x 16 mm.
X 10 skirtings = 22 ml. To tack, screw or glue.

Transition section profile or T-section

Length: 900 or 1800 mm.
X 10 units, film-wrapped, PVC base and hardware included.



White skirting F58 ou F80

Dim: 2200 x 58 x 12 mm or 2200 x 80 x 15 mm.
Packing: 5 pieces/box = 11 ml.
To clip, tack, screw or glue.

Coated quarter round «Scoties»

Dim: 2200 x 16 x 16 mm.
Packing: 10 pieces/box = 22 ml.
To clip, tack, screw or glue.

Adaptable covering skirting

Dim: 2200 x 130 x 16 mm.
Packing: 6 pieces/box = 13,2 ml.
Installation: to clip, tack, screw or glue.



Grout liner

For application below our filler as part of the Water resistant ALSAFLOORING installation protocol.
Dim: 10 mm x 5 m.



Water resistant filler


For application on a joint base as part of the ALSAFLOORING Water resistant installation protocol. 300ml PE cartridge (~300gr), box of 12 units.



Universal skirting adhesive

310 ml cartridge. Box of 12 units.

UNDERLAYS

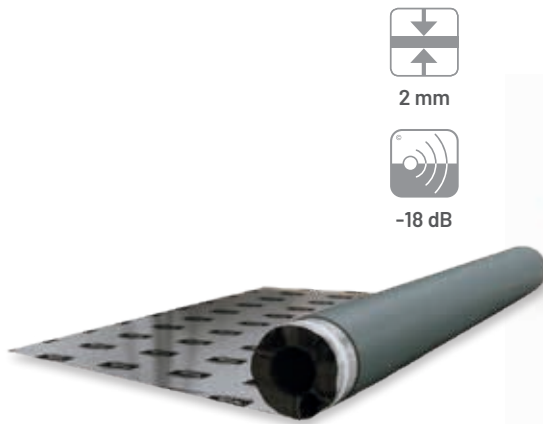

2 mm




-18 dB



2,15 mm



-18,8 dB

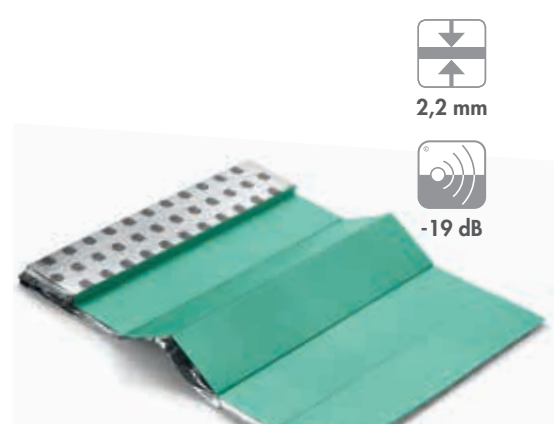

2,2 mm



-19 dB

MULTIPROTECT ACOUSTIC

Technical and versatile

PU+PET underlay lined with an aluminium vapour barrier. 26 % airborne noise reduction. High load resistance.

ALSAPLUS

Economical (2 in 1)

1 roll = 20 m²

Acoustic PE underlay ready-fitted with a vapour barrier (150 µ) and overlap strip.

AQUASTOP

Acoustic and thermic

1 box = 6 m²


3-in-1 folding XPS+PET underlay, including integrated vapour barrier and overlap strip. 14% airborne noise reduction.




5 mm



-19 dB

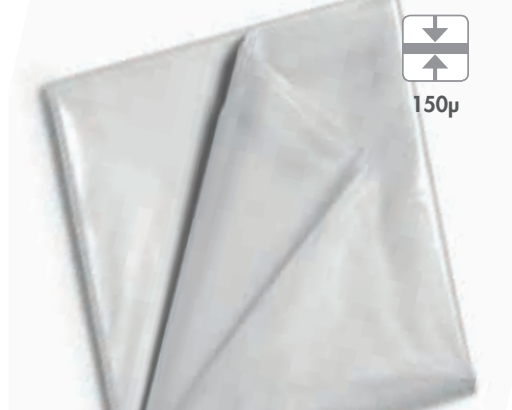

150µ

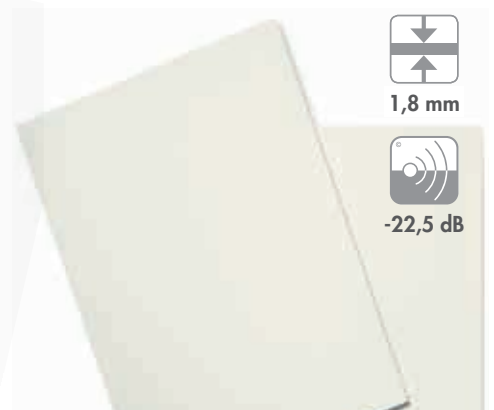

1,8 mm



-22,5 dB

FLOORISOL

Ecological and thermic

1 box = 7 m²

Stable and durable wood fibre tile underlay. Compensates for gaps of up to 3 mm.

ALSAPROTECT

1 box = 20 m²

It prevents moisture rising. Suitable with Floorisol and Conforlay.

CONFORLAY

Technical and efficient

1 box = 7 m²

Wood fibre underlay. High airborne noise reduction 42 %. Very high load resistance.



For more information please see our Accessories catalogue.



ALSAFLOOR

Z.I. - 1 rue de l'Europe - 67521 Marlenheim Cedex - France
tel. +33 (0)3 88 59 29 89 - fax. +33 (0)3 88 59 28 49

www.alsaflooring.com

A BRAND  **ALSA
FLOORING**